



Shelter Lighting System



The HS-LER-336-7200 Shelter Lighting System provides shelters with safe, secure and silent interior lighting. The HS-LER-336-7200 contains three LED light heads equipped with both white and red LEDs allowing for maximum visibility or if needed, preservation of night vision. Each light head produces 2,000 lumens (6,000 total) of white light and 400 lumens of red light (1,200 total). The system is extremely rugged and deploys quickly. It contains three red/white LED light heads, universal transformer, inline switch, fixing straps for easy mounting and a series of color coded industrial grade connecting cables. The light heads are linked together and secured via hanging straps inside the shelter/accommodation. The light color (red or white) is selected via an inline switch and each light head can be independently switched on or off. The lighting system can be powered by a variety of sources including 110-240v AC wall power as well as 12-30v DC options. Unlike conventional glass light tubes, the HS-LER-336-7200 light heads are virtually indestructible.

- White and red LED's in each head
- Silent operation
- Housed in a Pelican protector case
- Virtually indestructible
- Daisy-chain up to three light heads

Code **HS-LER-336-7200**

Applications

Technical Specifications

	TITE
0	11/11
- min	
· AB	是世界




Light Source				
LED Type	LED Life	Tested Lumen Value		
High Flux LED	50000 hrs.	1200 (Red LED) 6000 (White LED)		
Lamp Heads	Number of LEDs	Beam Spread		
3	6 LEDs per head 24 White/12 Red	210° Diffused		

Power Source			
Switch Settings	Input Voltage		
0	12 - 30vdc or 110-240vac		
12V Auxiliary Sockets	Watts	Voltage	
0	24	0	



Shelter Lighting System

Technical Specifications

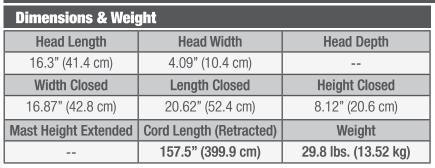

	C€	Approved
Approvals	CE Certificate	Yes
Approvais	RoHS (Restriction of Hazardous Substances) Compliant	Approved

Code **HS-LER-336-7200**

Orden Information

Product Code	Nº Focus	N° Led
HS-LER-336-7200	3	36

Colors

Black